

10WR300

LOW FREQUENCY TRANSDUCER
WR Series

KEY FEATURES

- High power handling: 600 W program power
- 2" copper wire voice coil
- High sensitivity: 95 dB (1W / 1m)
- FEA optimized ceramic magnetic circuit
- Weatherproof cone treatment for both sides of the cone
- Extended controlled displacement: X_{max} ± 6 mm
- 30 mm peak-to-peak excursion before damage
- Low harmonic distortion and linear response
- Wide range of applications of low and mid-low frequencies





TECHNICAL SPECIFICATIONS

Nominal diameter	250 mr	n 10 in
Rated impedance		8 Ω
Minimum impedance		6,5 Ω
Power capacity ¹		300 W _{AES}
Program power ²		600 W
Sensitivity	95 dB 1	W / 1m @ Z _N
Frequency range	!	55 - 5.000 Hz
Recom. enclosure vol.	15 / 50 I	0,53 / 1,77 ft ³
Voice coil diameter	50,8 m	m 2 in
BI factor		14,2 N/A
Moving mass		0,039 kg
Voice coil length		15 mm
Air gap height		8 mm
X _{damage} (peak to peak)		30 mm

THIELE-SMALL PARAMETERS 3

52 Hz
6,1 Ω
3,9
0,39
0,35
42 I
240 μ m / N
3,3 kg / s
1,5 %
$0,035 \text{ m}^2$
6 mm
210 cm ³
1 mH

Notes

¹ The power capaticty is determined according to AES2-1984 (r2003) standard.

² Program power is defined as power capacity + 3 dB.


³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

 $^{^4}$ The X_{max} is calculated as $(L_{VC} - H_{ag})/2 + (H_{ag}/3.5)$, where L_{VC} is the voice coil length and H_{ag} is the air gap height.



10WR300

LOW FREQUENCY TRANSDUCER
WR Series

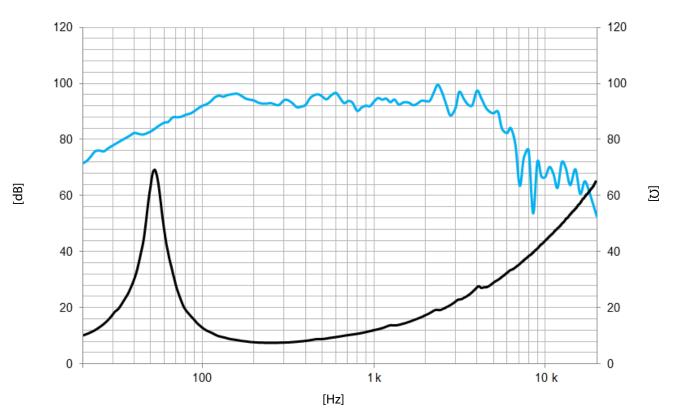

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION

Overall diameter	261 mm	10,3 in
Bolt circle diameter	243,5 mm	9,6 in
Baffle cutout diameter:		
- Front mount	228 mm	9,0 in
Depth	114 mm	4,5 in
Net weight	3,5 kg	7,7 lb
Shipping weight	3,9 kg	8,6 lb

DIMENSION DRAWING

