

# LF Pressed Chassis / Ferrite

## **TF1525**








• 15" bass and mid-range speaker driver unit providing 98dB sensitivity and

#### 8 Frequency Response

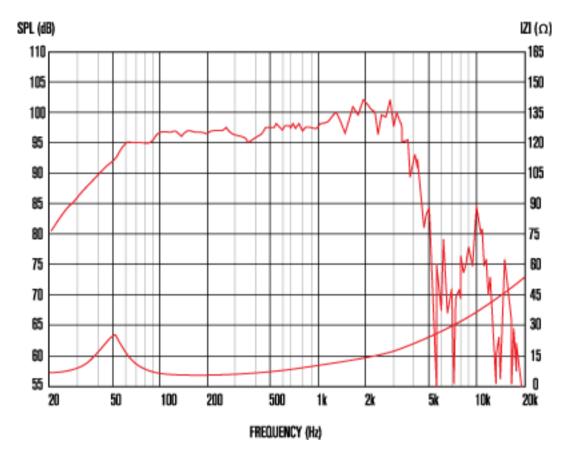

- 1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
- 2. Continuous Power Rating is defined as 3dB greater than the AES rating
- 3. Tested as per the EIA-426-A standard
- 4. Measured on axis at 1W, 1m in 2Î anechoic environment.
- 5. Xmax derived from: (voice coil winding width-gap depth)/2.
- 6. Small signal parameters measured after unit subjected to pre-conditioning signal

#### **General Specifications**

Nominal diameter	381mm/15in
Power rating •	250Wrms
Continuous power rating <sup>2</sup>	500W
EIA power rating <sup>3</sup>	400W
Nominal impedance	8
Sensitivity <sup>2</sup>	98dB
Frequency range	40-3,000Hz
Voice coil diameter	64mm/2.5in
Chassis type	Pressed steel
Magnet type	Ferrite
Magnet weight	1.2kg/42oz
Coil material	Round copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Suspension	Single
Xmax <sup>3</sup>	2.5mm/0.1in
Gap depth	8mm/0.31in
Voice coil winding width	13mm/0.51in

#### **Small Signal Parameters**

D	0.33m/12.99in
Fs	47.6Hz
Mms	77.93g/2.75oz
Qms	3.835
Qes	0.565
Mmd	64.1g/2.26oz
Qts	0.493
Re	5.15
Vas	148.41lt/5.24ft3
ВІ	14.57Tm
Cms	0.14mm/N
Rms	6.08kg/s
Le (at 1kHz)	0.09mH

### **Mounting Information**

Overall diameter	385mm/15.16in
Overall depth	153mm/6.02in
Cut-out diameter	351mm/13.82in
Mounting slot dimensions	9.2mm x 6.2mm/0.36in x 0.24in
Number of mounting slots	8
Mounting PCD range	369mm/14.56in
Unit weight	5.2kg/11.5lb

### **Packed Dimensions & Weight**

Single pack size W x D x H	410mm x 410mm x 180mm
	/16.1in x 16.1in x 7.1in
Single pack weight	6kg/11.0lb
Multi pack size W x D x H	1200mmx1000mmx980mm
Multi pack weight	270kg/595lb



Celestion, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL United Kingdom