

## Specification

Nominal Basket Diameter	15", 381mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	200W
Music Program	400W
Resonance	41Hz
Usable Frequency Range***	46Hz-3.5kHz
Sensitivity	97
Magnet Weight	25 oz
Gap Height	0.25", 6.35mm
Voice Coil Diameter	1.5", 38.1mm

## Thiele & Small Parameters

Resonant Frequency (fs)	41Hz
DC Resistance (Re)	5.88
Coil Inductance (Le)	0.84mH
Mechanical Q (Qms)	7.23
Electromagnetic Q (Qes)	1.53
Total Q (Qts)	1.26
Compliance Equivalent Volume (Vas)	260.0 ltr/9.2 cu. ft.
Peak Diaphragm Displacement Volume (Vd)	325cc
Mechanical Compliance of Suspension (Cms)	0.25mm/N
BL Product (BL)	7.7 T-M
Diaphragm Mass inc. Airload (Mms)	59 grams
Efficiency Bandwidth Product (EBP)	27
Maximum Linear Excursion (Xmax)	3.8mm
Surface Area of Cone (Sd)	856.3cm <sup>2</sup>
Maximum Mechanical Limit (Xlim)	8.4mm

## Mounting Information

Recommended Enclosure Volume	
Sealed	71-85 ltr/2.5-3 cu. ft.
Vented	106-177 ltr/3.75-6.25 cu. ft.
Overall Diameter	15.15", 384.8mm
Baffle Hole Diameter	13.77", 349.6mm
Front Sealing Gasket	Fitted as Standard
Rear Sealing Gasket	Fitted as Standard
Mounting Holes Diameter	0.25", 6.4mm
Mounting Holes B.C.D.	14.56", 369.9mm
Depth	5.83", 148mm
Net Weight	6.7 lbs, 3 kg
Shipping Weight	8.8 lbs, 4 kg

## Materials of Construction


Coil Construction	Copper
Coil	Polyimide
Magnet Composition	Ferrite
Core Details	Vented And Extended
Basket Materials	Pressed Steel
Cone Composition	Paper
Cone Edge Composition	Cloth
Dust Cap Composition	Solid Composition Paper




  
**EMINENCE®**  
 The Art and Science of Sound

## ALPHA-15A American Standard Series

Recommended for professional audio and bass guitar applications as a woofer in a vented or sealed enclosure.

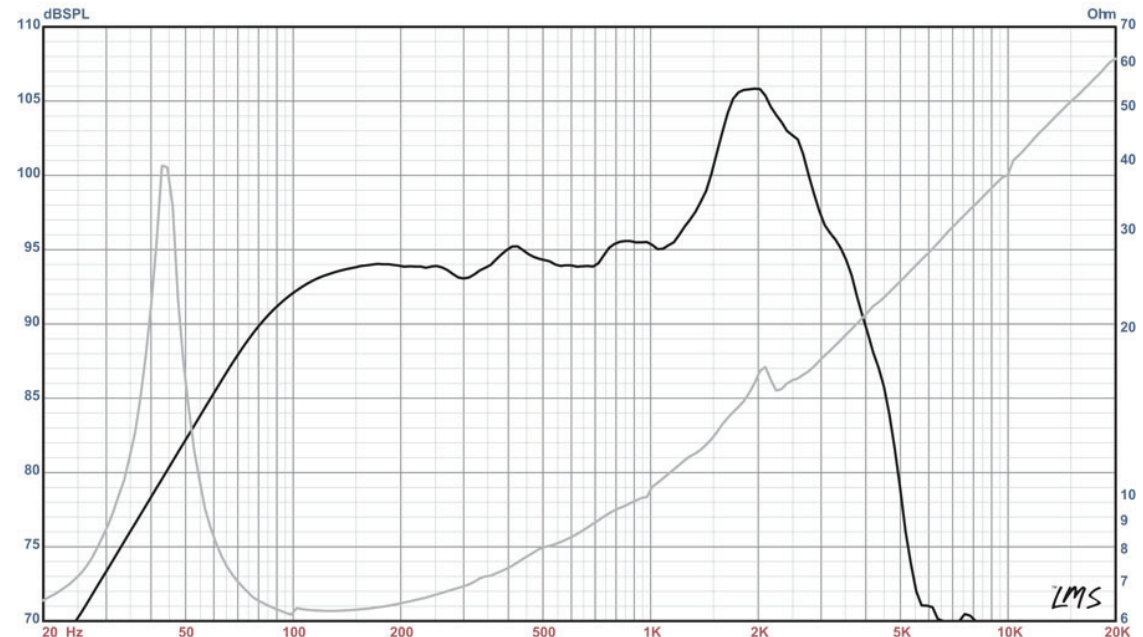

\* Please inquire about alternative impedances.

\*\* Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, nontemperature-controlled environment.

\*\*\* The average output across the usable frequency range when applying 1W/1m into the nominal impedance. I.e: 2.83 V/8 ohms, 4 V/16 ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. X 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)