


- LONG-THROW HIGH-POWER LOADING DESIGN (X-max=12mm)
- PAPER CONE WITH BIG ROLL, SPECIAL LESS DAMPING, WIDE RANGE TEMPERATURE RUBBER SURROUND
- VENTED POLE PIECE
- STAMPING STEEL BASKET
- SUITABLE FOR SUBWOOFER APPLICATION

8" PAPER SUBWOOFER

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.2 Ω
SENSITIVITY 1W/1m	83 dB
FREQUENCY RESPONSE	32-800 Hz
FREE AIR RESONANCE	32 Hz
VOICE COIL DIAMETER	49.5 mm
AIR GAP HEIGHT	8 mm
RATED POWER INPUT	150 W
MAXIMUM POWER INPUT	300 W
FORCE FACTOR, BL	13.03 TM
MAGNET WEIGHT (42.3 oz)	1196 g
MOVING MASS	99.78 g



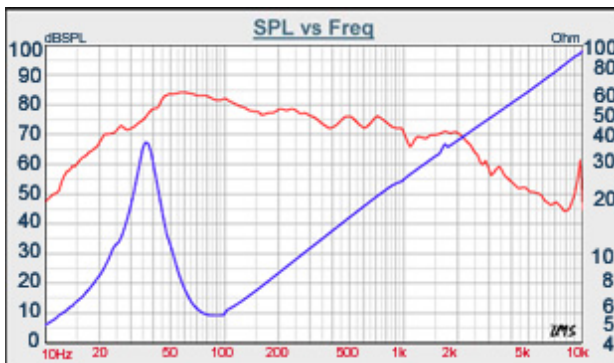

FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	194.54 μMN^{-1}
EFFEC.PISTON AREA	0.022 M^2
Levc	0.82 mH
Zo	38 ohm
X-max	12 mm
Vas	13.37 Litr.
Qts	0.39
Qms	4.26
Qes	0.43

CLOSE