



WF SERIES

W4-1658SB

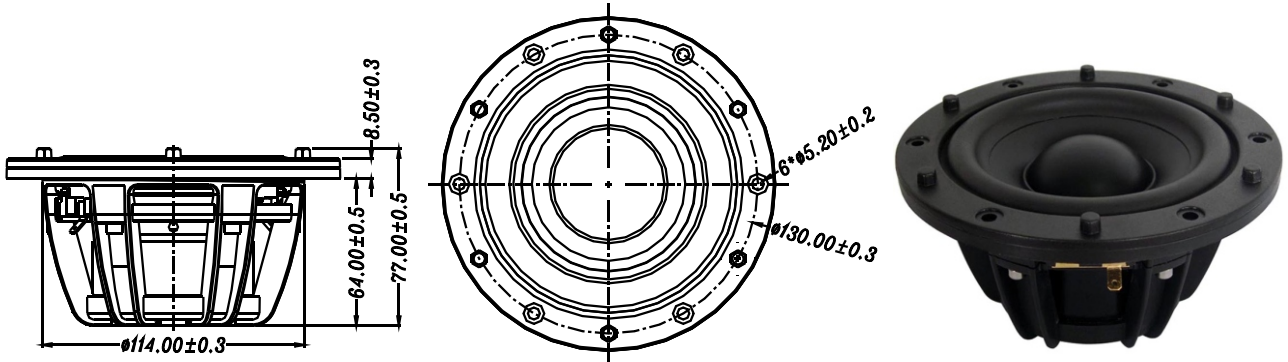

- LONG THROW, HIGH POWER LOADING, $X_{max} = 4.5\text{mm}$
- ENGINEERING PLASTIC OF NY66 FOR BASKET, IT'S TOUGH, STRONG AND EXCELLENT DIMENSION STABILITY
- UNIQUE CONE /DUST CAP,BASKET DESIGN TO ENSURE THE CONSISTENCY OF QUALITY
- ALUMINUM BASKET PANEL

4.5" PP MIDBASS

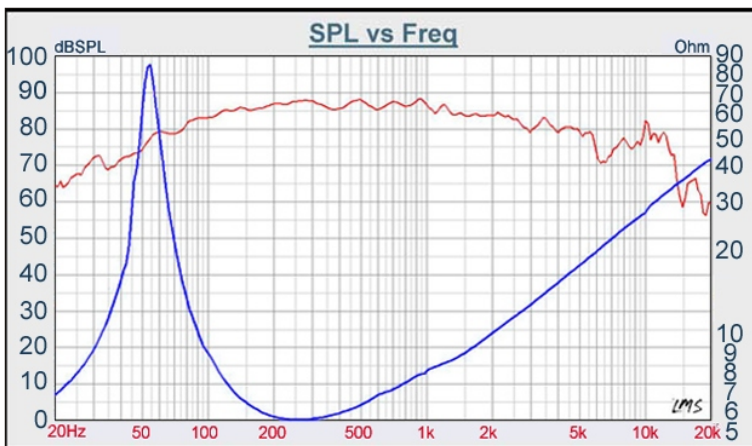

DIAPHRAGM MTL	PP
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.8 Ω
SENSITIVITY 1W/1M	87 dB
FREQUENCY RESPONSE	55Hz-6 K Hz
FREE AIR RESONANCE	55 Hz
VOICE COIL DIAMETER	49.5 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	45 W
MAXIMUM POWER INPUT	90 W
FORCE FACTOR, BL	5.62TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	9.98 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	847.548 MN ⁻¹
EFFECTIVE PISTON AREA	0.00785 M ²
Levc	0.144 mH
Zo	85 ohm
Xmax	4.5 mm
Vas	7.42 Litr
Qts	0.39
Qms	8.84
Qes	0.41

TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com