



Key features

- 96 dB SPL 1W / 1m average sensitivity
- 100mm (4") interleaved sandwich voicecoil (ISV)
- 900 W continuous pink noise
- Weather protected cone and plates for outdoor use
- Double Silicon Spider (DSS) for improved excursion control and linearity
- Demodulating Ring for lower distortion
- Improved heat dissipation via unique basket design

GENERAL SPECIFICATIONS

NOMINAL DIAMETER	300 mm	(12 in)
RATED IMPEDANCE	8 ohms	
CONTINUOUS PINK NOISE	900 W	(1)
CONT. POWER	600 W	(2)
PROGRAM POWER	1200 W	(3)
PEAK POWER	6000 W	(4)
SENSITIVITY	96 dB	(5)
FREQUENCY RANGE	50 - 2800 Hz	(6)
POWER COMPRESSION		(7)
@-10 dB (60 W)	0,7 dB	
@-3 dB (300 W)	2,1 dB	
@FULL POWER (600 W)	3,2 dB	
MAX RECOMM. FREQUENCY	1300 Hz	
RECOMM. ENCLOSURE VOLUME	30 - 100 lt.	(1,06 - 3,53 cuft)
MINIMUM IMPEDANCE	6 Ohms at 25 deg.	
MAXI EXCURSION PEAK TO PEAK	34 mm	(1,34 in)
VOICE COIL DIAMETER	100 mm	(3,95 in)
VOICE COIL WINDING MATERIAL	copper	


THIELE-SMALL PARAMETERS (8)

Fs	48 Hz
Re	5 ohms
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	9,60
Qes	0,34
Qts	0,33
Vas	44 lt. (1,55 cuft)
Mms	98 gr. (0,22 lb)
BL	20,9 Tm
Linear Mathematical Xmax	± 9,5 mm (± 0,37 in) (9)
Le(1kHz)	1,85 mH
Ref. Efficiency	
dB / 1W / 1m (half space)	93,5 dB


MOUNTING INFORMATION

Overall diameter	315 mm	(12,4 in)
N. of mounting holes	8	
Mounting holes diameter	7,15 mm	(0,28 in)
Bolt circle diameter	296-300 mm	(11,65 - 11,8 in)
Front mount baffle		
cutout diameter	282 mm	(11,1 in)
Rear mount baffle		
cutout diameter	282 mm	(11,1 in)
Total depth	141mm	(5,55 in)
Flange and gasket thickness	19 mm	(0,75 in)
Net weight	11,95 kg	(26,38 lb)
Shipping weight	12,6 kg	(27,81 lb)
CardBoard packing dimensions	332 x 332 x 184 mm	(13,07 x 13,07 x 7,24 in)


FREQUENCY RESPONSE CURVE OF 12LW1400 MADE ON 50 Lt. ENCLOSURE TUNED 60Hz IN FREE FIELD (4pi) ENVIROMENT. ENCLOSURE CLOSE THE REAR OF THE DRIVER . THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

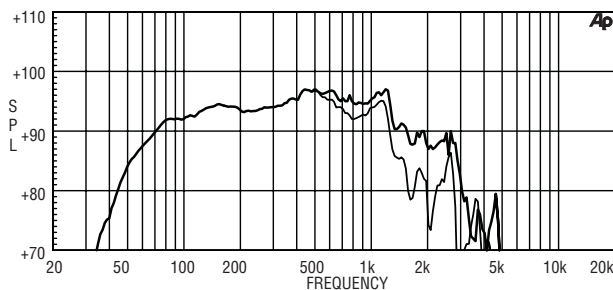

FREE AIR IMPEDANCE MAGNITUDE CURVE

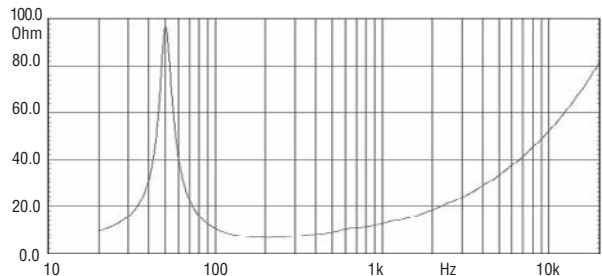

NORMALIZED AMPLITUDE RESPONSE (dB/Hz)

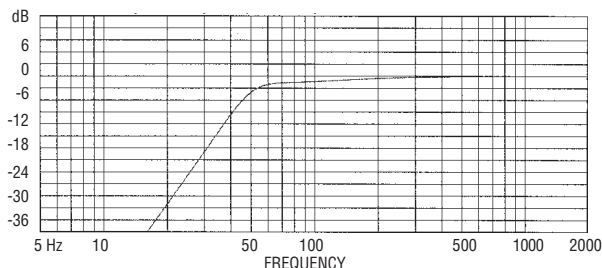

Box Parameters

Custom Vented Box

Vb	= 35,0 Lt.	Fill	= normal
Fb	= 50.0 Hz	Dv	= 14,00 cm
QL	= 7.0	Lv	= 43,10 cm

(1) AES standard
 (2) Continuous power rating is measured in 50 lit. enclosure tuned 60Hz using a 40-400Hz band limited pink noise test signal applied continuously for 2 hours.
 (3) *Program power rating is measured as for "2" above but 50% duty cycle."
 (4) The peak power rating is based on a 10dB crest factor above the continuous power rating and represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.
 (5) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone , at distance 1m from the baffle panel, when connected to 2,83 V sine wave test signal swept

between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for 2 above.
 (6) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
 (7) Power compression represents the loss of sensitivity for the specified power, measured from 50-500 Hz, after 5 min pink noise preconditioning test at the specified power.
 (8) Thiele - small parameters are measured after the test specimen has been conditioned by 900 W AES power and represent the expected long term parameters after ashort period of use .
 (9) Linear Mat. Xmax is calculated as; (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is gap depth.