

12ND930

Low Frequency Neodymium Driver

022128N220 8 ohm



Key features

- 98 dB SPL 1W/1m average sensitivity
- 75mm interleaved sandwich voice coil (ISV)
- 500 W continuous pink noise
- Neodymium magnet assembly
- Demodulating ring for lowest distortion
- Humidity resistant cone
- Ideal for compact high loading enclosures.

GENERAL SPECIFICATIONS

NOMINAL DIAMETER	300mm	(12 in)
RATED IMPEDANCE	8 ohms	
CONTINUOUS PINK NOISE	500 W	(1)
CONT. POWER	400 W	(2)
PROGRAM POWER	800 W	(3)
PEAK POWER	1600 W	(4)
SENSITIVITY	98 dB	(5)
FREQUENCY RANGE	46 ÷ 4500 Hz	(6)
POWER COMPRESSION		(7)
@-10 dB (40 W)	0,7 dB	
@-3 dB (200W)	1,9 dB	
@FULL POWER (400 W)	2,7 dB	
MAX. RECOMM. FREQUENCY	2000 Hz	
RECOMM. ENCLOSURE VOLUME	40 - 100 lt.	(1,41 - 3,53 cuft)
MINIMUM IMPEDANCE	6,4 ohms at 25 deg.	
MAX EXCURSION PEAK TO PEAK	30 mm	(1,18 in)
VOICE COIL DIAMETER	75 mm	(3 in)
VOICE COIL WINDING MATERIAL	copper	


THIELE-SMALL PARAMETERS

(8)	
Fs	50 Hz
Re	5,1 ohms
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	6,34
Qes	0,29
Qts	0,28
Vas	54,7 lt. (1,93 cuft)
Mms	72 gr. (0,16 lb)
BL	20 Tm
Linear Mathematical Xmax	±7,5 mm (± 0,3 in) (9)
Le (1kHz)	1,33 mH
Ref. Efficiency	
dB / 1W / 1m (half space)	95,8 dB


MOUNTING INFORMATION

Overall diameter	315 mm	(12,4 in)
N. of mounting holes	8	
Mounting holes diameter	7,15 mm	(0,28 in)
Bolt circle diameter	296 - 300 mm	(11,65 - 11,8 in)
Front mount baffle cutout diameter	282 mm	(11,1 in)
Rear mount baffle cutout diameter	282 mm	(11,1 in)
Total depth	141 mm	(5,55 in)
Flange and gasket thickness	11 mm	(4,37 in)
Net weight	4 kg	(8,83 lb)
Shipping weight	4,8 kg	(10,6 lb)
CardBoard packing dimensions	332 x 332 x 184 mm	(13,07 x 13,07 x 7,24 in)


FREQUENCY RESPONSE CURVE OF 12ND930 MADE ON 50 Lt. ENCLOSURE TUNED 60Hz IN FREE FIELD (4pi) ENVIROMENT. ENCLOSURE CLOSE THE REAR OF THE DRIVER . THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

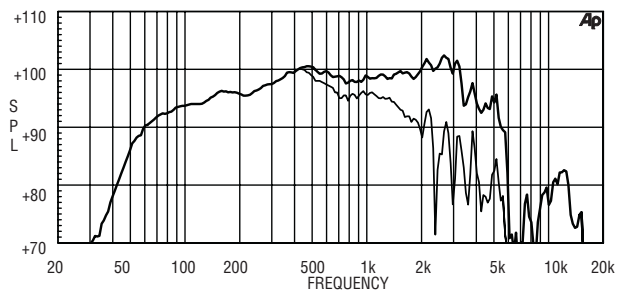

FREE AIR IMPEDANCE MAGNITUDE CURVE

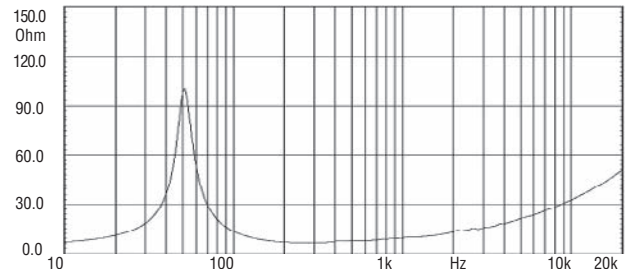

NORMALIZED AMPLITUDE RESPONSE (dB/Hz)

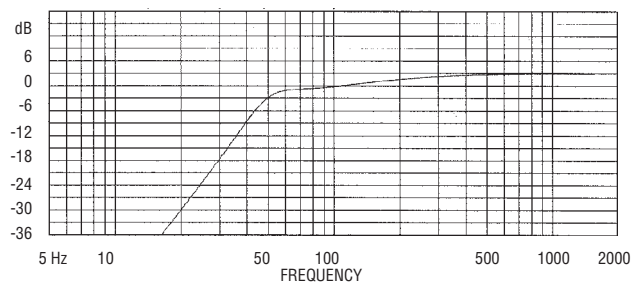

Box Parameters

Custom Vented Box

Vb	= 45,00 Lt.	Fill	= normal
Fb	= 50.0 Hz	Dv	= 12,50 cm
QL	= 7.0	Lv	= 17,00 cm

(1) AES standard

(2) Continuous power rating is measured in 50 lit enclosure tuned 60Hz using a 40 - 400Hz band limited pink noise test signal applied continuously for 2 hours.

(3) "Program power rating is measured as for "2" above but 50% duty cycle."

(4) The peak power rating is based on a 6dB crest factor above the continuous power rating and represents the maximum permitted instantaneous peak power level over a maximum period of 10ms which will be withstood by the loudspeaker without damage.

(5) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83 V sine wave test signal swept

between 100Hz and 500Hz with the test specimen mounted in the same enclosure as given for 2 above.

(6) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.

(7) Power compression represents the loss of sensitivity for the specified power, measured from 50-500 Hz, after a 5 min pink noise preconditioning test at the specified power.

(8) Thiele - small parameters are measured after the test specimen has been conditioned by 600 W AES power and represent the expected long term parameters after a short period of use.

(9) Linear Mat. Xmax is calculated as; (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is gap depth.