


CS 260 A

600+600 Watt max 2+2 Ω
Ø 250 mm / 10"



SUB WOOFER

Membrana in cellulosa smorzata
Sospensione in poliuretano


Doped paper cone
Polyurethane surround



Potenza nominale	300+300 W
Impedenza nominale	2+2 Ω
Sensibilità (1W/1m)	90 dB
Ø bobina mobile	64 mm
Altezza traferro	8 mm
Fori di fissaggio	8 \varnothing7 / \varnothing245
Foro pannello	231 mm

Re	1,9+1,9 Ω
Fs	47,8 Hz
Qms	8,62
Qes	0,65
Qts	0,61
Mms	91,1 g
Cms	0,12 mm/N

D	205 mm
Vas	18,59 dm³
BxI	12,94 Wb/m
Xmax	11 mm
η°	0,30 %
Le	0,97 mH
Peso	6,8 Kg

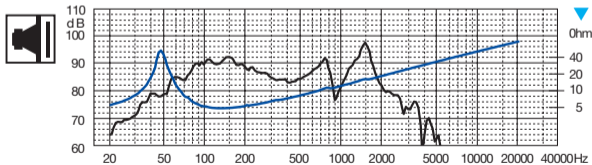

■ Parametri rilevati con bobine mobili in serie ■ Parameters taken with coils in series