


CS 393 A

1000+1000 Watt max 2+2 Ω
 \varnothing 380 mm / 15"




SUB WOOFER

Membrana in cellulosa smorzata
Sospensione in gomma

Doped paper cone
Rubber surround



Potenza nominale	500+500 W	Re	1,75+1,75 Ω	D	309 mm
Impedenza nominale	2+2 Ω	Fs	35 Hz	Vas	70 dm³
Sensibilità (1W/1m)	92 dB	Qms	11	BxI	21,58 Wb/m
\varnothing bobina mobile	100 mm	Qes	0,39	Xmax	11 mm
Altezza traferro	10 mm	Qts	0,37	η°	0,73 %
Fori di fissaggio	8 \varnothing6,5 / \varnothing368	Mms	239 g	Le	0,62 mH
Foro pannello	350 mm	Cms	0,09 mm/N	Peso	15 Kg

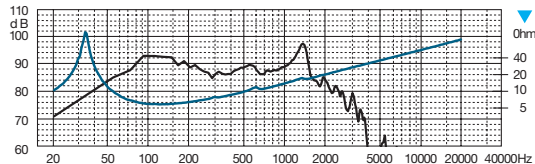

Parametri rilevati con bobine mobili in serie

Parameters taken with coils in series