

CT 198


► **100 Watt max** **4 Ω**
Ø **20 mm**

► **8 Ω** ☺ **HOME HT198**

TWEETER

■ Soft dome in poliammide,
magnete in neodimio,
con supporto

■ Silk soft dome ferrofluid
cooled, magnet in neodymium

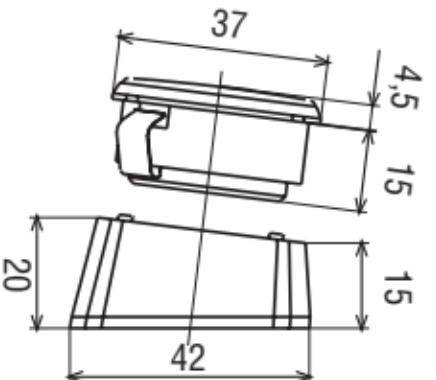

CP
6

S

AI

N

Fe

Potenza nominale	50 W	Re	3,2 Ω	D
Impedenza nominale	4 Ω	Fs	1,5 Hz	Vas
Sensibilità (1W/1m)	91 dB	Qms		BxI 1 Wb/m
Ø bobina mobile	20 mm	Qes		Xmax
Altezza traferro	1,5 mm	Qts		η° 1 %
Fori di fissaggio		Mms	0,15 g	Le 0,015 mH
Foro pannello	33 mm	Cms		Peso 0,058 Kg

