


HW 175

240 Watt max | 8 Ω | \varnothing 165 mm / 6,5"

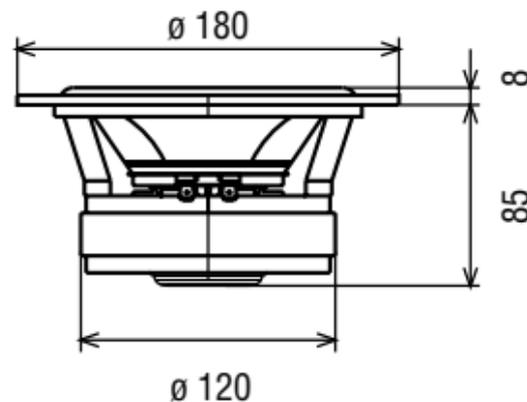

WOOFER

Membrana in cellulosa smorzata, sospensione in gomma, rifasatore ad ogiva
Doped paper cone, rubber surround, ogive phase plug



Potenza nominale	120 W	Re	6,87 Ω	D	130 mm
Impedenza nominale	8 Ω	Fs	51,6 Hz	Vas	21 dm³
Sensibilità (1W/1m)	91,5 dB	Qms	4,21	Bxl	8,33 Wb/m
\varnothing bobina mobile	38 mm	Qes	0,35	Xmax	4 mm
Altezza traferro	6 mm	Qts	0,32	η_o	0,79 %
Fori di fissaggio	6 \varnothing 4,5 / \varnothing 167	Mms	10,9 g	Le	0,3 mH
Foro pannello	146 mm	Cms	0,87 mm/N	Peso	2,6 Kg

