

PA 065

30 Watt max


8 Ω

Ø 65 mm / 2,5"

EXTENDED RANGE

Membrana in cellulosa
Sospensione in poliuretano

Paper cone
Polyurethane surround

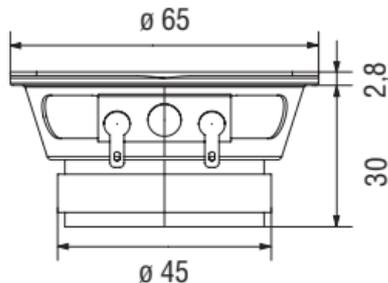

Potenza nominale **10 W**

Impedenza nominale **8 Ω**

Sensibilità (1W/1m) **88 dB**

Ø bobina mobile **14 mm**

Altezza traferro **3 mm**

Fori di fissaggio **4^ø4,5/Ø 75**

Foro pannello **65 mm**

Re **6,8 Ω**

Fs **154 Hz**

Qms **4,12**

Qes **1,90**

Qts **1,30**

Mms **1,01 g**

Cms **1,05 mm/N**

D **53 mm**

Vas **0,71 dm³**

BxI **1,87 Wb/m**

Xmax **1 mm**

η° **0,13%**

Le **0,15 mH**

Peso **0,19 Kg**

