



# H 6.1

Hybrid range,  
 Ø 6", Ø 2" voicecoil, 8Ω




## SPECIFICATIONS

General Data		
Overall Dimensions	<b>DxH</b>	160mm(6.3")x67mm(2.63")
Nominal Power Handling (DIN)	<b>P</b>	150W
Transient Power 10ms		500W
Sensitivity 1W/1M		89 dB SPL
Frequency Response		30-3000 Hz
Cone/Dome Material		Damped Polymer Composite
Net Weight	<b>Kg</b>	0.6
Electrical Data		
Nominal Impedance	<b>Z</b>	8Ω
DC Resistance	<b>Re</b>	5.6Ω
Voice Coil Inductance @ 1KHz	<b>LBM</b>	0.43mH
Voice Coil and Magnet Parameters		
Voice Coil Diameter	<b>DIA</b>	54mm
Voice Coil Height		12mm
HE Magnetic Gap Height	<b>HE</b>	5mm
Max. Linear Excursion	<b>X</b>	± 3.5mm
Voice Coil Former		Aluminum
Voice Coil Wire		Hexatech™ Aluminum
Number Of Layers		2
Magnet System Type		Hybrid rear vented
B Flux Density	<b>B</b>	0.9 T
BL Product	<b>BXL</b>	6.7 N.A
T-S Parameters		
Suspension Compliance	<b>Cms</b>	1.018 mm/N
Mechanical Q Factor	<b>Qms</b>	2.2
Electrical Q Factor	<b>Qes</b>	0.42
Total Q Factor	<b>Qts</b>	0.35
Mechanical Resistance	<b>Rms</b>	1.545 Kg/s
Moving Mass	<b>Mms</b>	11.78 g
Eq. Cas Air Load (liters)	<b>VAS</b>	20 Lt
Resonant Frequency	<b>Fs</b>	44 Hz
Effective Piston Area	<b>SD</b>	119 cm <sup>2</sup>



## FEATURES

- \* Hybrid magnet system
- \* 2" Hexatech™ Aluminum voice coil
- \* High power handling
- \* Shallow profile D.P.C cone

## Unit Dimensions

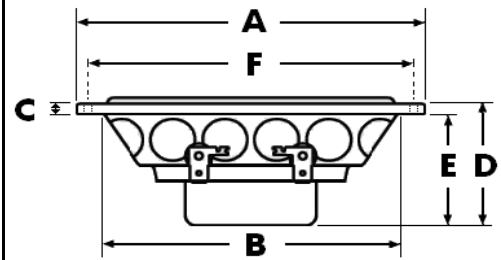

- A** - Overall diameter 160mm
- B** - Cut out diameter 136mm
- C** - Flange thickness 6mm
- D** - Overall height 67mm
- E** - Basket/Magnet depth 61mm
- F** - Mounting holes location diameter 152mm
- G** - 4 Mounting holes, at 90° interval, inner hole diameter Ø 4.2mm

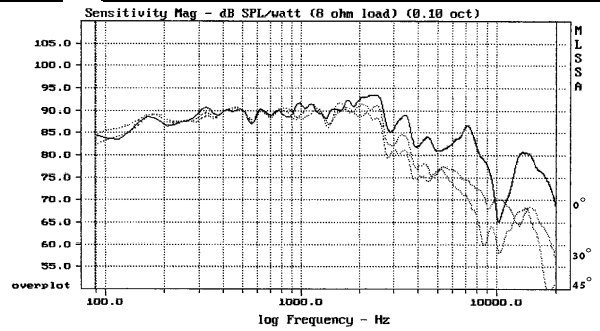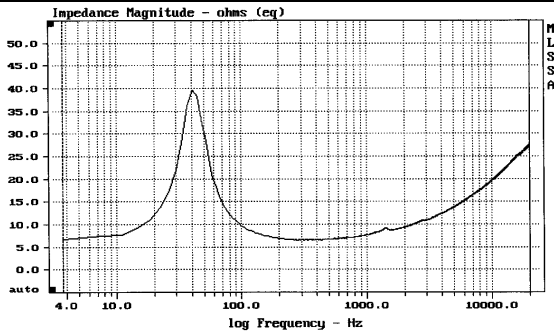

Morel operate policy of continuous product design improvement, consequently specifications are subject to alteration without prior notice.