

Search...

[Home \(/en/\)](#) > [FERRITE HF DRIVERS \(/en/products/ferrite-hf-drivers.html\)](#) > [D44](#)

## D44

[D44 \(/en/products/ferrite-hf-drivers/399-d44.html\)](#)

[Curves \(/en/products/ferrite-hf-drivers/399-d44.html?start=1\)](#)

[Drawings \(/en/products/ferrite-hf-drivers/399-d44.html?start=2\)](#)

[All Pages \(/en/products/ferrite-hf-drivers/399-d44.html?showall=1\)](#)

**NEW** 1" High Frequency Compression Driver, 1.75" voice coil, 40 W, 108.5 dB



### KEY FEATURES:

- 1" Exit Throat
- 1.75" Diaphragm
- 80 W continuous program power
- Frequency range: 1000Hz - 20kHz
- New phase plug design
- Copper inductance ring for extended response
- Vented suspension

[Back to Top](#)

## PART NUMBER:

D44- 8  $\Omega$  - 14110F0308  
D44-16  $\Omega$  - 14110F0316

The D44 is new improved version of D2544.

It is 1" high frequency compression ferrite driver, that incorporates new phase plug, new dome with vented suspension and copper inductance ring, which improve sound characteristic and ensure very low distortion at high sound levels.

The smooth impedance response in crossover region ensures perfect work with passive crossovers

It is suitable for use in high quality 2 way and 3 way boxes. The voice coil assembly is easily field replaceable without soldering.

## SPECIFICATIONS

Throat diameter	25,4 mm (1 in.)
Nominal impedance	8/16 Ohms
Minimum impedance	9.08 /14.62 Ohms
D.C. resistance	5,70 /10,16 Ohms
Power capacity (2-20 kHz)	40W
Program Power Capacity (2-20 kHz)	80W
Sensitivity (2-15 kHz)	108.5 dB
Frequency range	1 - 20 kHz
Recommended crossover	1,5 kHz or higher 12 dB/oct.min
Voice coil diameter	44 mm (1,75 in.)
Flux density	1.6 T

## MATERIALS OF CONSTRUCTION

Diaphragm	sandwich polyester
Voice coil material	Aluminium
Voice coil former	Kapton™

Positive voltage on red terminal moves diaphragm toward the phasing plug.

## MOUNTING INFORMATION




Overall diameter	110 mm
Depth	60.9 mm
Mounting	2 x M6 holes 180°/ 76.2 mm/3" diameter
Net weight	1,7 kg

## SERVICE KIT

Diaphragm assembly:

**NDA45/h-8** part No: R411700408 for 8  $\Omega$  drivers

**NDA45/h-16** part No: R411700416 for 16  $\Omega$  drivers

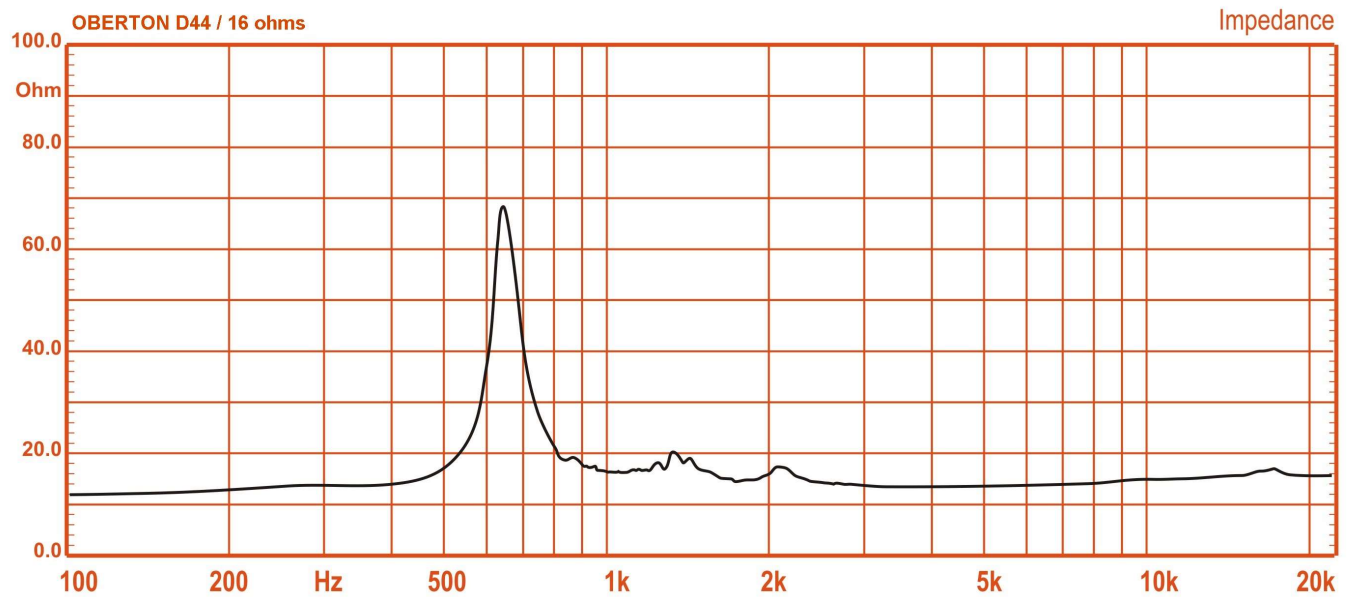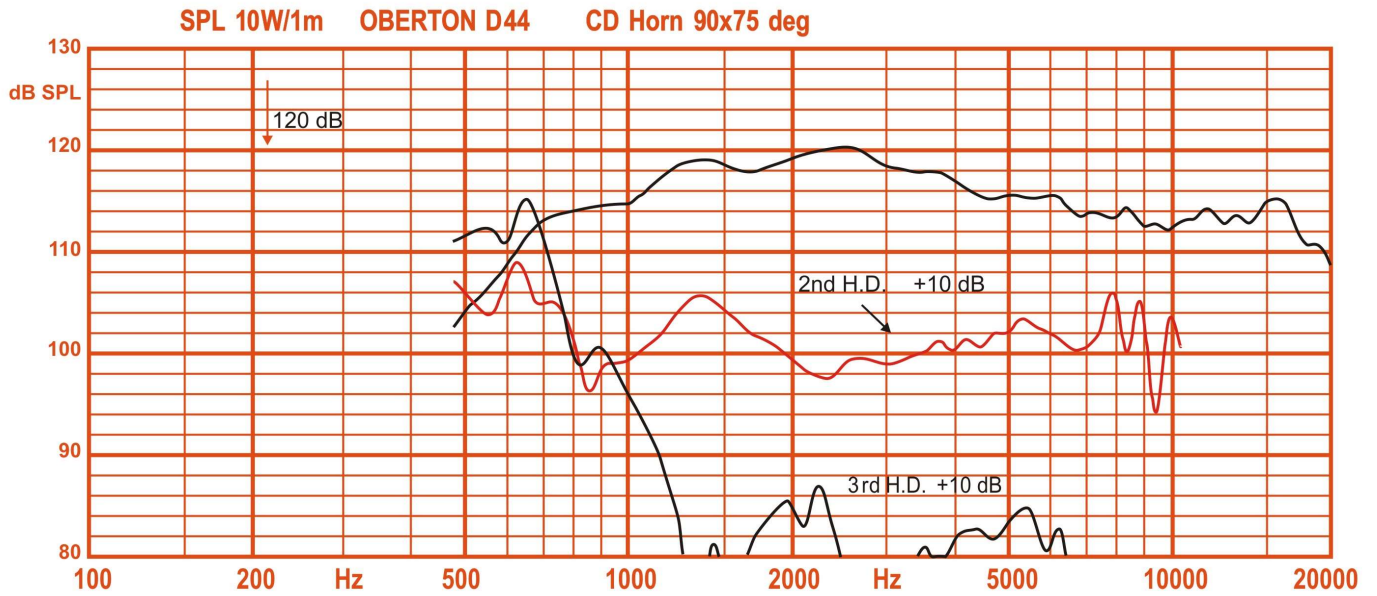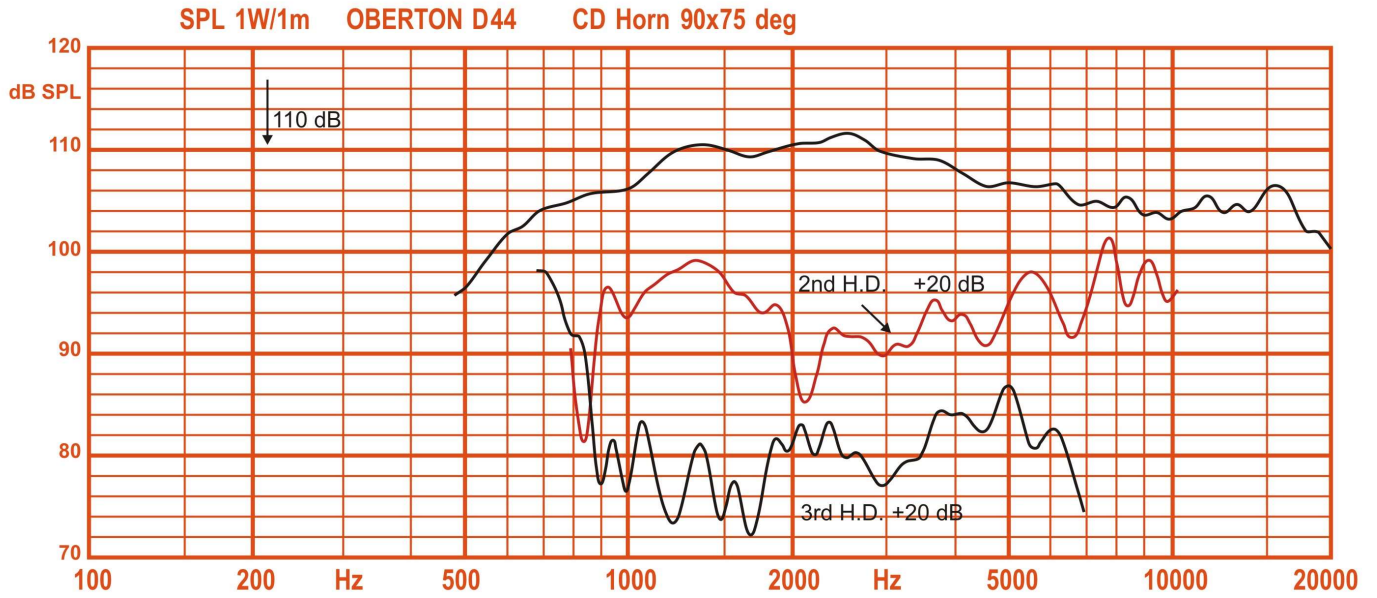



Copyright © 2021 OBERTON Professional Loudspeakers. All Rights Reserved.

[Terms and conditions \(/en/terms-and-conditions.html\)](/en/terms-and-conditions.html)

[Privacy Policy \(/en/privacy-policy.html\)](/en/privacy-policy.html)