


# MS 320

400+400 Watt max | 8+8 Ω | Ø 320 mm / 12"

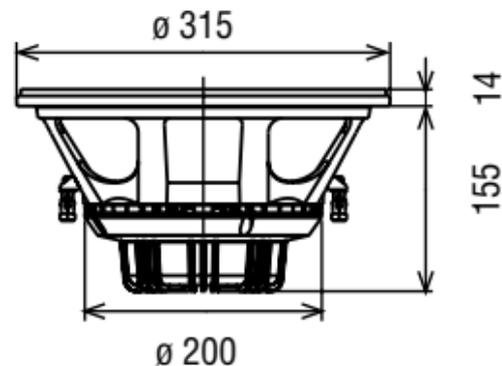

## SUB WOOFER

Membrana in cellulosa smorzata, sospensione in gomma, magneti in neodimio schermato  
Doped paper cone, rubber surround, neodymium shielded magnet



Potenza nominale	<b>200+200 W</b>	Re	<b>5,5+5,5 Ω</b>	D	<b>260 mm</b>
Impedenza nominale	<b>8+8 Ω</b>	Fs	<b>30,3 Hz</b>	Vas	<b>138 dm<sup>3</sup></b>
Sensibilità (1W/1m)	<b>93 dB</b>	Qms	<b>1,45</b>	BxI	<b>18,96 Wb/m</b>
Ø bobina mobile	<b>64 mm</b>	Qes	<b>0,47</b>	Xmax	<b>6,5 mm</b>
Altezza traferro	<b>8 mm</b>	Qts	<b>0,35</b>	η <sub>o</sub>	<b>0,79 %</b>
Fori di fissaggio	<b>8 Ø 6,5 / Ø 295</b>	Mms	<b>80 g</b>	Le	<b>0,73 mH</b>
Foro pannello	<b>284 mm</b>	Cms	<b>0,35 mm/N</b>	Peso	<b>3,26 Kg</b>

