



T96A

Features

A high performance horn super tweeter that developed based on the previously released T96A-RE as the limited production model. It features high frequency characteristics that extend well beyond the audible range and excellent transients.

By adding to an existing speaker system, such as a back-loaded horn system using a high-efficiency full range unit, it will not only extend the high frequency characteristics, but also improve the total sound quality.

Features

- A diaphragm enhanced by an aluminum outer ring for fidelity of high-frequency range playback.
- Alnico magnet for high magnetic flux density.
- High rigidity aluminum die-cast cylindrical horn/equalizer to minimize resonances and obtaining high transparency.
- Gold-plated copper terminal

Specifications


Impedance	: 8Ω
Reproduction Frequency Response	: 6kHz ~ 35kHz(-10dB)
S.P.L	: 96dB/W(1m)
Input	: 15W(NOM)
Cutoff Frequency	: 5kHz
Recommended Cross-over Frequency	: More Than 8kHz (-12dB/oct.)
Magnet Weight	: 34g(Alnico)
Net Weight	: 600g



Frequency Response

/ Impedance

FOSTER Electric Co.,Ltd anechoic chamber
/ Input 2.83V(1W) / mic distance 1m

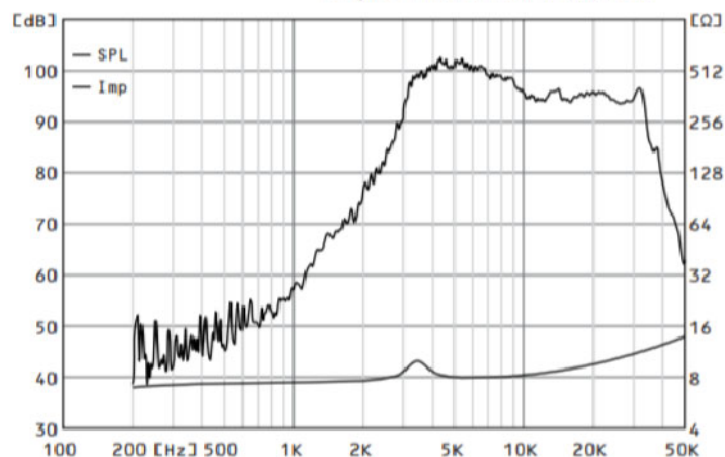

Dimensions

/ Mounting Information

