



HiFi SERIE

AMT 29CM 1.1


| | |
|--|------------------------|
| RESISTANCE | NOMINAL 8 OHM |
| Zo 9.3 OHM • Zmin 8.5 OHM • RE 8.5 OHM | |
| SENSITIVITY @ 2.83 V | 100 dB |
| FREQUENCY RESPONSE / -6 dB | 1350 Hz – 25 kHz |
| POWER HANDLING | 250 W |
| RESONANCE FREQUENCY / FS | 1500 Hz |
| RECOMMENDED CROSSOVER / 6 dB | 2200 Hz |
| RECOMMENDED CROSSOVER / 12 dB | 2000 Hz |
| DISPERSION HORIZONTAL / 15 kHz / -6 dB | 60° |
| DIAPHRAGM AREA | 6515 mm ² |
| MAGNET MATERIAL | NEODYMIUM |
| FACE PLATE | 3 mm Anodized Aluminum |
| TOTAL WEIGHT | 300 g |
| FACE PLATE DIM. | 125 x 195 mm |

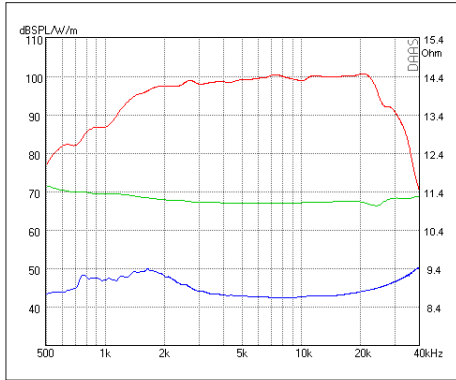


SPL 2.83 V - Phase - Impedance

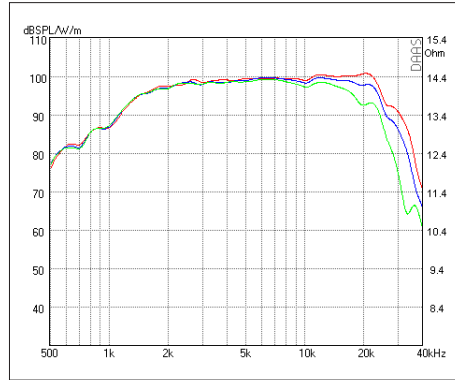


SPL HORIZONTAL 0° - 15° - 30°

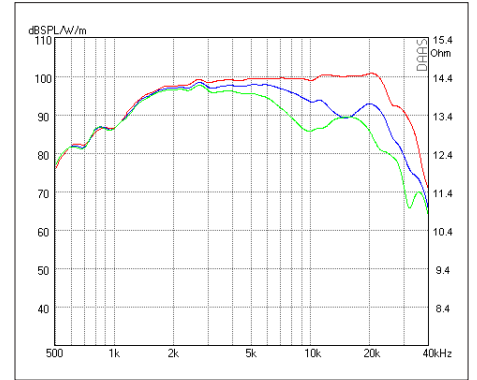


SPL VERTIKAL 0° - 5° - 15°

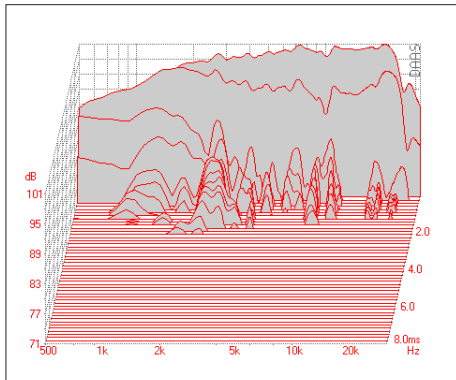


Waterfall




Harmonic Distortion 105 dB

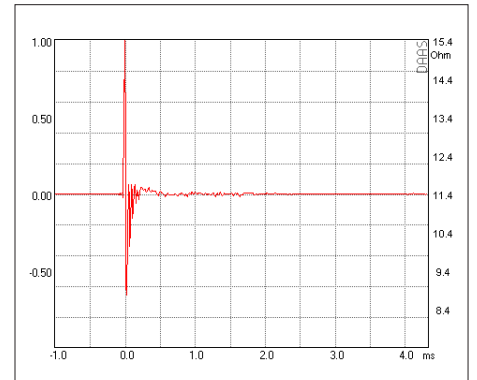


Impulse Response

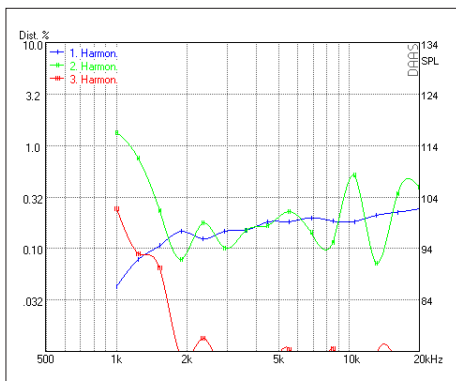

Harmonic Distortion 2.83 V

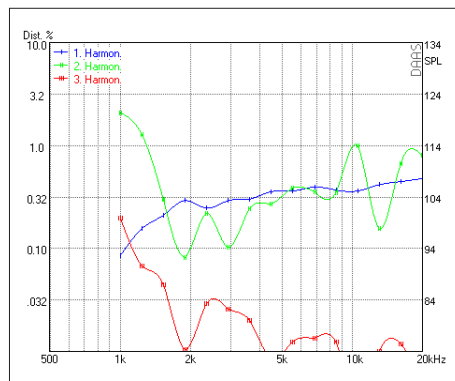

Harmonic Distortion 105 dB

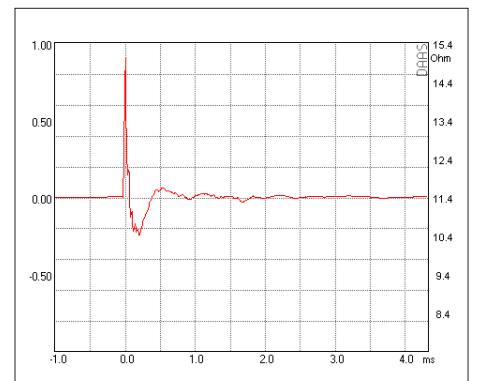

Step Response