


TW SERIES


25-1743S

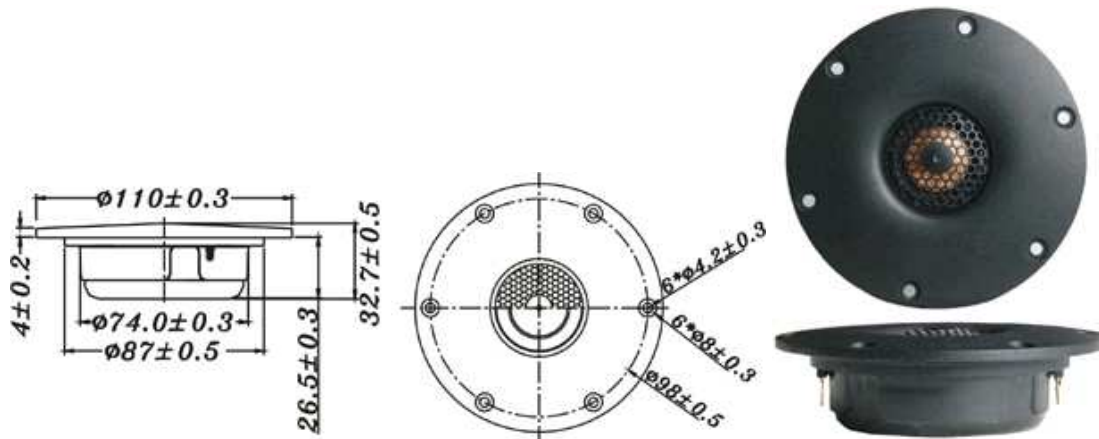

25mm BERYLLIUM DOME TWEETER

- BERYLLIUM ALLOY DOME, FABRIC SURROUND
- NEODYMIUM MAGNET, SHIELDED
- SHORT RING, STAMPING STEEL BACK CHAMBER
- Fo=450Hz
- VERY LOW 2nd & 3rd DISTORTION (LOW THD)
- ALUMINUM FRONT PANEL
- FERROFLUID COOLED

DIAPHRAGM MTL	Beryllium Alloy
SURROUND MTL	Fabric
NOMINAL IMPEDANCE	8 W
DCR IMPEDANCE	6 W
SENSITIVITY 1W/1m	91 dB
FREQUENCY RESPONSE	450Hz-20K Hz
FREE AIR RESONANCE	450 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	2.5 mm
RATED POWER INPUT	8 W
MAXIMUM POWER INPUT	80 W
FORCE FACTOR, BL	N/A
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	N/A
FERROFLUID ENHANCED	Yes
SUSPENSION COMPLIANCE	N/A
EFFECTIVE PISTON AREA	N/A
Levc	0.004 mH
Zo	17 ohm
X-max	N/A
Vas	N/A
Qts	N/A
Qms	N/A
Qes	N/A

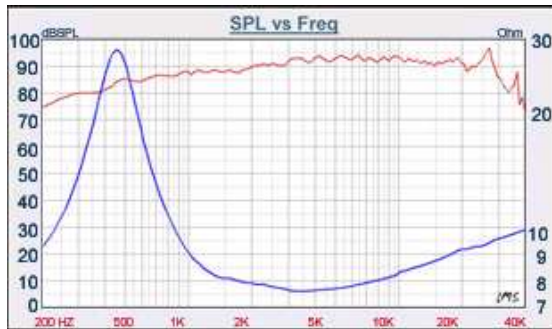

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL: info@tb-speaker.com

CLOSE