


# AT SERIES

# 25-1414SC

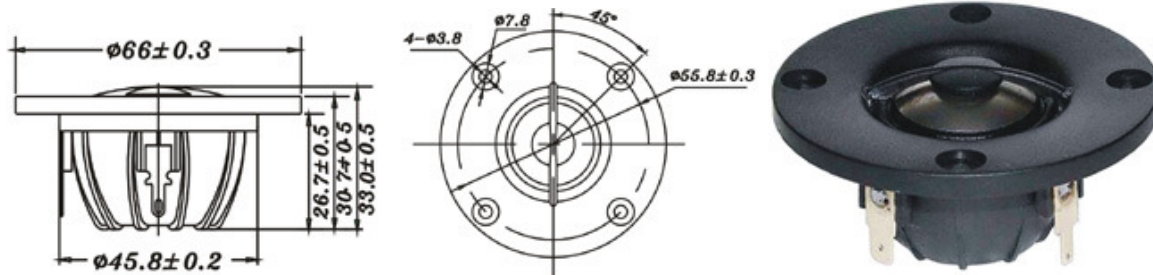

## 1" TITANIUM DOME/NEODYMIUM

- TITANIUM DOME DIAPHRAGM WITH FABRIC SURROUND
- FERROFLUID COOLED
- ABS FRONT PANEL WITH EQUALIZER
- NEODYMIUM DESIGN WITH BACK CHAMBER



DIAPHRAGM MTL	Titanium
SURROUND MTL	N/A
NOMINAL IMPEDANCE	4Ω
DCR IMPEDANCE	3Ω
SENSITIVITY 1W/1m	90 dB
FREQUENCY RESPONSE	800-20K Hz
FREE AIR RESONANCE	800 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	2 mm
RATED POWER INPUT	8 W
MAXIMUM POWER INPUT	80 W
FORCE FACTOR, BL	N/A
MAGNET WEIGHT ( oz)	Neodymium
MOVING MASS	N/A
FERRO FLUID ENHANCED	Yes
SUSPENSION COMPL.	N/A
EFFEC.PISTON AREA	N/A
Levc	0.008 mH
Zo	7 ohm
X-max	0.28mm
Vas	N/A
Qts	0.78
Qms	1.89
Qes	1.34



VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com

**CLOSE**