


- WOOFER: SPECIAL FABRIC CONE WITH WILD RANGE TEMP, HIGHER LOSS RECIPE OF RUBBER SURROUND
- TWEETER: 25MM SILK DOME, SHORT RINGTREATED, LOW 2nd,3rd DISTORTION
- ALUMINIUM DIE CAST BASKET
- NEODYMIUM MOTOR STRUCTURE
- MAGNETICALLY SHIELDED
- COAXIAL SPEAKER DESIGN

## 6.5" COAXIAL FULL RANGE

DIAPHRAGM MTL	Fabric
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.4 Ω
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	50Hz -20K Hz
FREE AIR RESONANCE	50 Hz
VOICE COIL DIAMETER	38.5 mm
AIR GAP HEIGHT	6 mm
NOMINAL POWER	45 W
MUSIC POWER	90 W
FORCE FACTOR, BL	6.45 T M
MAGNET WEIGHT ( oz)	Neodymium
MOVING MASS	13.8 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	753 MN <sup>-1</sup>
EFFECTIVE PISTON AREA	0.0014 m <sup>2</sup>
Levc	0.15 mH
Zo	78 ohm
X-max	3.5 mm
Vas	20.97 Litr
Qts	0.60
Qms	7.21
Qes	0.66

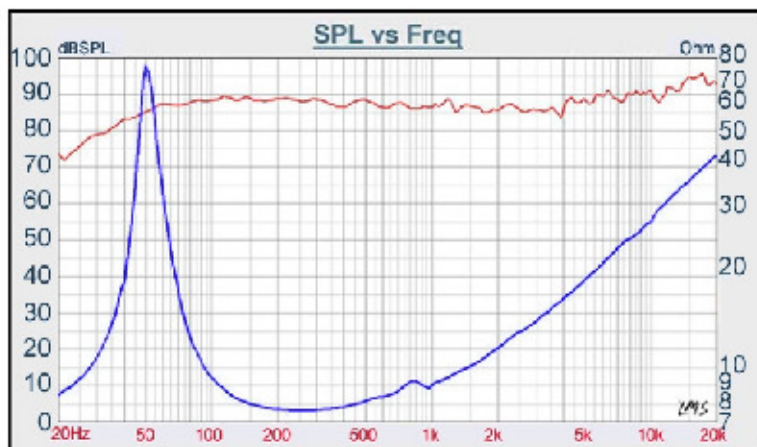

blue planet acoustic  
[www.oaudio.de](http://www.oaudio.de)  
 Das Produkt wird ohne Weiche geliefert.